

Testpassport**Q&A**



H i g h e r Q u a l i t y

B e t t e r S e r v i c e !

We offer free update service for one year
[Http://www.testpassport.com](http://www.testpassport.com)

Exam : **E20-651**

Title : Networked Storage-SAB
Installation and
Troubleshooting Exam

Version : DEMO

1. Which tools are used in the management of the Connectrix Switch?

- A. Serial Connect, SSH, Embedded Web Server, Web Tools and Connectrix Manager.
- B. Telnet, Embedded Web Server, Web Tools Serial Connect and Connectrix Manager.
- C. Embedded Web Server, Parallel Connect, SSH, Web Tools and Connectrix Manager.
- D. Parallel Connect, Telnet, Embedded Web Server, Web Tools and Connectrix Manager.

Answer: B

2. Which command will show the version of PowerPath being run?

- A. powermt version
- B. powermt show version
- C. powermt display version
- D. powermt check_registration

Answer: A

3. How many ports are there in a M-Series ASIC?

- A. 2
- B. 3
- C. 4
- D. 8

Answer: D


4. What addressing mode is used in Windows and Sun with Fibre Channel?

- A. LUN Addressing
- B. Logical Addressing
- C. Volume Set Addressing
- D. Peripheral Device Addressing

Answer: D

5. Click the Exhibit button.

What do the lights on the WWN bezel of the Connectrix 12000B indicate?

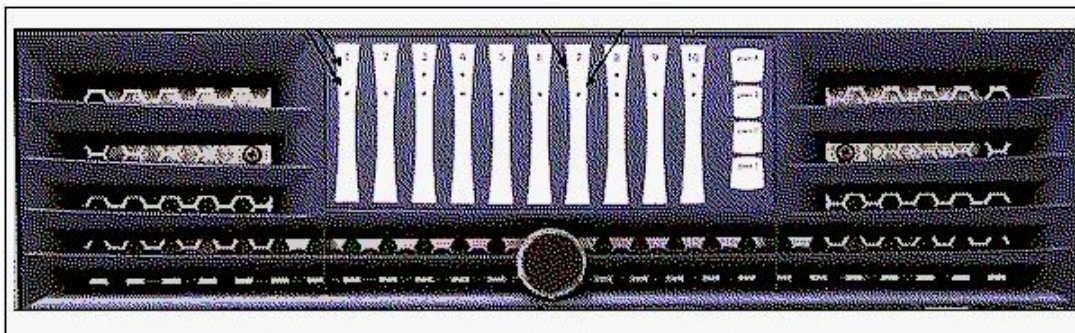

- A. power LED / status LED

- B. activity LED / power LED
- C. wwn LED / cabinet temperature
- D. fan speed indicator / temp indicator

Answer: A

6. Which [2] of the current Connectrix MDS products support the IPS Line Module?

- A. 9120
- B. 9140
- C. 9216
- D. 9509

Answer: CD

7. Click the Exhibit button.

What command would you use to display this information?

```
MDS_9509_Group2#  
  
VSAN 1  
The local switch is the Principal Switch.  
  
Local switch run time information:  
  State: Stable  
  Local switch WWN:      20:01:00:0c:85:72:89:01  
  Running fabric name: 20:01:00:0c:85:72:89:01  
  Running priority: 2  
  Current domain ID: 0x69(105)  
  
Local switch configuration information:  
  State: Enabled  
  FCID persistence: Disabled  
  Auto-reconfiguration: Disabled  
  Contiguous-allocation: Disabled  
  Configured fabric name: 20:01:00:05:30:00:28:df  
  Configured priority: 128  
  Configured domain ID: 0x00(0) (preferred)  
  
Principal switch run time information:  
  Running priority: 2  
  
Interface          Role          RCF-reject  
-----  
port-channel 3    Downstream    Disabled  
-----
```

- A. show vaan
- B. show zone
- C. show interface
- D. show fcdomain

Answer: D

8. What happens when the SAN Manager host discovers the SAN?

- A. New records are added to the VCMDB.
- B. Directly connected switches are rebooted.

C. Zoning information is added to FibreZone database.

D. New Production Hosts are connected to the switch.

Answer: C

9. How many Zone Sets can be Activated per Fabric using SAN Manager?

A. 1

B. 2

C. 3

D. 4

Answer: A

10. Which package must be installed on the Connectrix Service Processor so that SAN Manager can perform zoning on McData switches?

A. SAN Manager

B. Internet Explorer

C. FibreZoneBridge

D. Solutions Enabler

Answer: C

11. Which Protocol is characterized by distance, connectivity and speed?

A. SCSI

B. Fibre

C. Escon

D. Bus & Tag

Answer: B

12. Which four [4] client host types can be used with the Java based support on Connectrix Manager?

A. AIX

B. Sun

C. Linux

D. HP-UX

E. TRU64

F. Windows

G. Mainframe

Answer: ABDF

13. How many Connectrix Directors/switches can be managed with a single Service Processor with Connectrix Manager?

A. 4

- B. 28
- C. 38
- D. 48

Answer: D

14. What is the Default ip address for a DS-16b2?

- A. none
- B. 10.255.0.1
- C. 10.77.77.77
- D. 192.168.1.1

Answer: C

15. Your customer is using EMC Solutions Enabler 5.1. What is the recommended volume masking to discover HBAs in this environment?

- A. symmask discover hba
- B. symmask discover hbas
- C. symmaskd discover hba
- D. symmaskdb discover hbas

Answer: A

16. Which M-Series switch also supports Arbitrated Loop logins?

- A. ED64M
- B. ED1032
- C. DS16M2
- D. DS24M2

Answer: D

17. Which two [2] tasks must be performed on the CLARiiON before configuring PowerPath?

- A. Select PowerPath
- B. Create Storage groups
- C. Configure Volume Logix
- D. Set the failover mode to 1
- E. Configure Array Compath

Answer: DE

18. Which command displays the current firmware version in a B-Series device?

- A. version
- B. cfgshow
- C. vershow

D. shoversion

Answer: A

19. Which command will reconfigure PowerPath?

A. powermt config

B. powermt set mode

C. powermt set policy

D. powermt set config

Answer: A

20. Select three [3] Connectrix MDS EXEC commands.

A. Show

B. Config

C. Cfgdisable

D. Traceroute

E. Configshow

F. Switchshow

Answer: ABD