

Testpassport**Q&A**



H i g h e r Q u a l i t y

B e t t e r S e r v i c e !

We offer free update service for one year
[Http://www.testpassport.com](http://www.testpassport.com)

Exam : **1Z0-850**

Title : Java Standard Edition 5 and
6, Certified Associate Exam

Version : Demo

1.Which two are true? (Choose two.)

- A. J2EE runs on consumer and embedded devices.
- B. J2EE includes the MIDP API.
- C. J2EE includes servlet APIs and EJB APIs.
- D. J2EE application developers need J2SE.
- E. J2EE applications depend on web servers.

Answer: C,D

2.Which two are associated with the web tier in a J2EE web-based application.? (Choose two.)

- A. servlets
- B. JAX-RPC
- C. JMS
- D. entity beans
- E. JSP

Answer: A,E

3.Given:

```
1. class Test {  
2. public static void main(String args[]) {  
3. int num1 = 10, num2 = 20, result;  
4. result = calc(num1, num2);  
5. System.out.println(result);  
6. }  
7.  
8. // insert code here  
9. }
```

Which, inserted at line 8, produces the output 30?

- A. static int calc(int n1, int n2) { return; }
- B. public int calc(int n1, int n2) { return n1 + n2; }
- C. public int calc(int n1, int n2) { return; }
- D. static int calc(int n1, int n2) { return n1 + n2; }
- E. static void calc(n1, n2) { return (n1 + n2); }
- F. static int calc(int n1, n2) { return n1, n2; };

Answer: D

4.Given:

```
1. public abstract class Wow {  
2. private int wow;  
3. public Wow(int wow) {  
4. this.wow = wow;  
5. }  
6. public void wow() { }  
7. private void wowza() { }  
8. }
```

Which is true about the class Wow?

- A. It does NOT compile because an abstract class must have at least one abstract method.
- B. It does NOT compile because an abstract class CANNOT have instance variables.
- C. It compiles without error.
- D. It does NOT compile because an abstract class CANNOT have private methods.
- E. It does NOT compile because an abstract class must have a constructor with no arguments.

Answer: C

5. Given:

- 1. class X {
- 2. private Y y;
- 3. public X(Y y) { this.y = y; }
- 4. }
- 5. class Y {
- 6. private X x;
- 7. public Y() { }
- 8. public Y(X x) { this.x = x; }
- 9. }

The instance variable y is intended to represent the composition relationship "X is composed of Y."

Which code correctly maintains this meaning?

A. X x1 = new X(new Y())

;

X x2 = new X(new Y())

;

B. X xx = new X(null)

;

Y y1 = new Y(xx)

;

Y y2 = new Y(xx)

;

C. Y yy = new Y()

;

X x1 = new X(yy)

;

X x2 = new X(yy)

;

D. Y y1 = new Y(new X(null))

;

Y y2 = new Y(new X(null))

;

Answer: A

6. Which type of J2EE component is used to store business data persistently?

- A. stateless session beans

- B. JavaBeans
- C. stateful session beans
- D. entity beans
- E. JavaServer Pages

Answer: D

7.What is the purpose of JNDI?

- A. to access native code from a Java application
- B. to parse XML documents
- C. to access various directory services using a single interface
- D. to register Java Web Start applications with a web server

Answer: C

8.Which two are true about HTML? (Choose two.)

- A. HTML can set up hypertext links between documents.
- B. HTML uses tags to structure text into headings, paragraphs, and lists.
- C. HTML is an object-oriented programming language.
- D. HTML documents CANNOT be browsed by a text editor.

Answer: A,B

9.Given:

```
4. class Example {
5. int x = 50;
6. int y = 100;
7. public static void main(String args[]) {
8. int x = 0, y = 10;
9. Example ex = new Example();
10. while (x < 3) {
11. x++; y--;
12. }
13. System.out.println("x = " + x + " , y = " + y);
14. }
15. }
```

What is the result?

- A. Compilation fails because of an error at line 8.
- B. x = 3 , y = 7
- C. Compilation fails because of an error at line 11.
- D. Compilation fails because of an error at line 9.
- E. x = 53 , y = 97
- F. Compilation fails because of an error at line 10.

Answer: B

10.You have developed a MIDlet that runs on a Java-enabled Personal Digital Assistant (PDA) device. Now, your employer has asked you to port the MIDlet to run on other Java platforms. Which is true?

- A. The MIDlet is 100% portable across all J2ME devices.
- B. The MIDlet can run within a standard web browser.
- C. The MIDlet is guaranteed to run correctly under J2SE.
- D. The MIDlet is NOT guaranteed to run on a Java technology-enabled phone.

Answer: D

11.Which statement is true?

- A. JMS enables an application to provide flexible, asynchronous data exchange.
- B. JMS provides interfaces to naming and directory services.
- C. The JMS API is located in the java.jms package.
- D. JMS enables an application to provide tightly coupled, distributed communication.

Answer: A

12.Which two are true about stateless session beans? (Choose two.)

- A. They are used to represent data stored in an RDBMS.
- B. They implement the JMS API.
- C. They are used to implement business logic.
- D. They CANNOT hold client state.

Answer: C,D

13.Which two are true about javax.swing? (Choose two.)

- A. It includes classes for creating buttons and panels.
- B. It is used to create MIDlets.
- C. It is used to create applications that have the same user interface on different platforms.
- D. It uses the native GUI components of each platform.

Answer: A,C


14.Which two are true? (Choose two.)

- A. An interface CANNOT be extended by another interface.
- B. An abstract class CANNOT be extended by an abstract class.
- C. An interface can be extended by an abstract class.
- D. An abstract class can implement an interface.
- E. An abstract class can be extended by a concrete class.
- F. An abstract class can be extended by an interface.

Answer: D,E

15.Click the Exhibit button.

Which relationships, referenced by the class names involved, are drawn using valid UML notation?

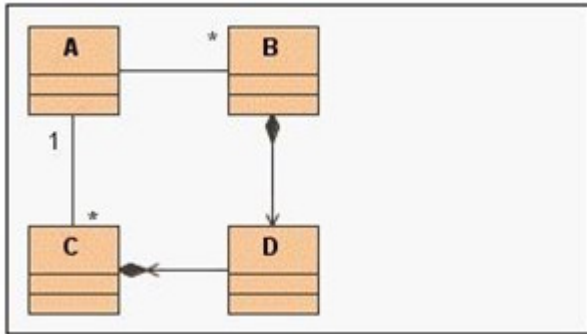

- A. AB, AC, BD, and CD
- B. only AC, BD, and CD
- C. only AB, AC, and BD
- D. only AB and AC
- E. only BD and CD

Answer: A

16. Given:

12. String s = "abcdefgabc";

13. char c = s.charAt(2);

14.

15. if (c == 'c')

16. s = s.replace('c', 'X');

17. else if (c == 'b')

18. s = s.replace('b', 'O');

19. else

20. s = s.replace('c', 'O');

21. System.out.println(s);

What is the result?

- A. aOcdefgabc
- B. Compilation fails.
- C. abOdefgabc
- D. abXdefgabc
- E. abOdefgabO
- F. aOcdefgaOc
- G. abXdefgabX

Answer: G

17. Which package contains classes used to create data collections, such as maps or queues?

- A. java.lang
- B. java.io
- C. java.awt
- D. java.net
- E. javax.swing
- F. java.util

Answer: F

18. Given:

1. interface A { }
2. interface B { void b(); }
3. interface C { public void c(); }
4. abstract class D implements A,B,C { }
5. class E extends D {
6. void b() { }
7. public void c() { }
8. }

Which is true?

- A. Compilation fails due to an error in line 6.
- B. The code compiles without error.
- C. Compilation fails due to an error in line 2.
- D. Compilation fails due to an error in line 4.
- E. Compilation fails due to an error in line 1.

Answer: A

19. What type of relationship is needed to represent the relationship between students and the courses they are enrolled in at a university?

- A. a one-to-one composition
- B. a one-to-one association
- C. a many-to-many composition
- D. a one-to-many composition
- E. a one-to-many association
- F. a many-to-many association

Answer: F

20. Which two are features of JNDI? (Choose two.)

- A. an interface to store and retrieve named Java objects of any type
- B. an interface to search for objects using attributes
- C. a defined common set of messaging concepts and programming strategies
- D. connectivity to databases and other tabular data sources

Answer: A,B