

Testpassport**Q&A**



H i g h e r Q u a l i t y

B e t t e r S e r v i c e !

We offer free update service for one year
[Http://www.testpassport.com](http://www.testpassport.com)

Exam : C_HAMOD_2404

**Title : SAP Certified Associate -
Data Engineer - SAP HANA**

Version : DEMO

1.What can you do with shared hierarchies? Note: There are 2 correct answers to this question.

- A. Access hierarchies created in external schemas
- B. Enable SQL SELECT statements to access hierarchies
- C. Provide reusable hierarchies for drilldown in a CUBE with star join
- D. Provide reusable hierarchies for drilldown in a CUBE without star join

Answer: B D

2.Why would you create SQL in calculation views?

- A. To implement custom logic
- B. To provide an alternative to graphical modeling
- C. To fine-tune performance
- D. To enable write capabilities


Answer: A

3.Which type of join supports a temporal condition in a calculation view?

- A. Referential join
- B. Inner join
- C. Text join
- D. Left outer join

Answer: B

4.Referring to the diagram,

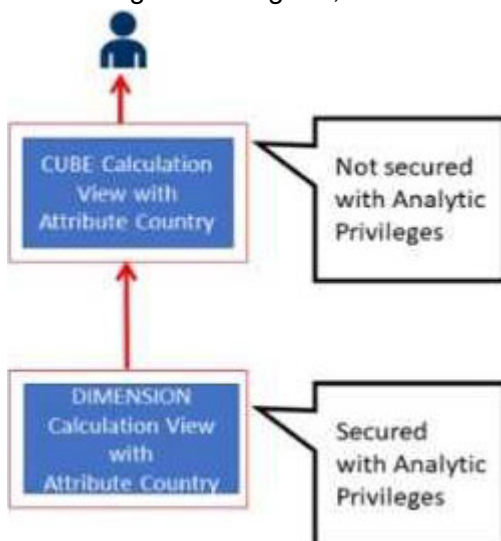

Which privileges would a user require to view United States data when querying the CUBE calculation view?

- A. A SELECT privilege on the CUBE calculation view and an Analytic Privilege (Country = United States) on the DIMENSION calculation view
- B. A SELECT privilege and an Analytic Privilege (Country = United States) on the DIMENSION calculation view
- C. A SELECT privilege and an Analytic Privilege (Country = United States) on the CUBE calculation view
- D. SELECT privileges and Analytic Privileges (Country = United States) on both views

Answer: A

5.What options do you have to handle orphan nodes in your hierarchy? Note: There are 2 correct answers to this question.

- A. Define an expression to determine a parent.
- B. Generate additional root nodes.
- C. Assign them to a level below the root.
- D. Assign them to a node at the root level.

Answer: B C